


Guard Station Video Management Software

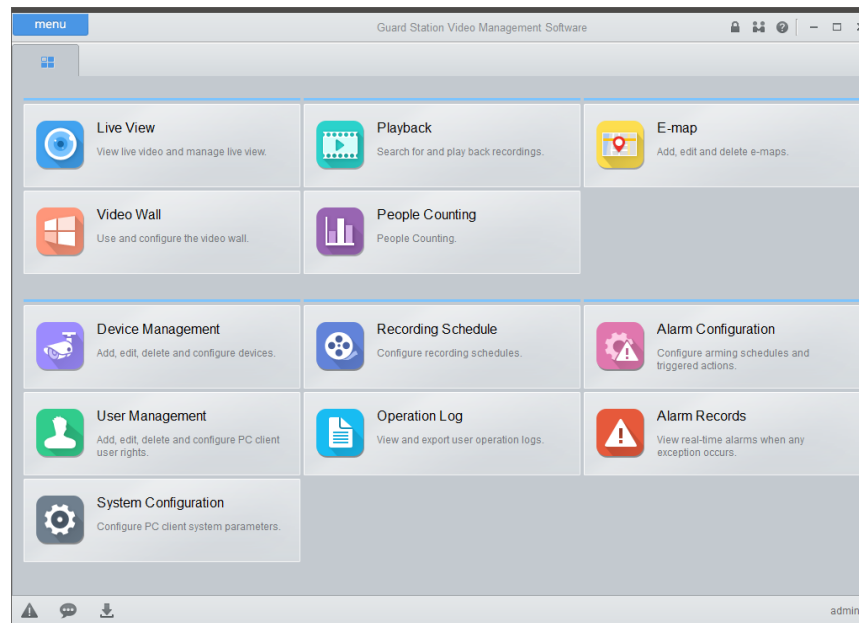

Client VMS

Guard Station

- > Unified management for IP cameras, DVRs, NVRs, storage servers, stream servers, video wall controllers, etc.
- > Flexible to manage up to 256 local channels and 128 cloud channels; add, edit and share cloud devices
- > Live view: up to 36 live view, view resume, custom view, split screen, multi-window display, corridor mode, sequence display, video-associated audio, two-way audio and audio broadcast
- > Record: local recording, recording schedule, alarm record, record download
- > Playback: time/event retrieval, local/remote playback, async/sync playback, VOD for different speed, smart search and SD card search
- > PTZ control: Pan, tilt, zoom, 3D positioning, preset, patrol, pattern, and patrol plan
- > People counting: entered/left/entered and left statistics, daily/weekly/monthly/yearly report export
- > Flexible maintenance such as log export, alarm info export
- > Friendly user interface for easy operation

Specifications

Video	
Devices Support	Max. 256 local channels and 128 cloud channels Max. 256 local encoding devices and 128 cloud devices Max. 32 decoding devices
Features	Auto device discovery, and adding, configuring, time adjusting in batch
Live Monitoring	
Screen Layout	1/ 4/ 5 /6 /8 /9 /10 /13 /16 /17 /25 /32 /36 split screen(s) with up to 1 sub screen Note: Max. 36 screens live view
PTZ Control	Pan, Tilt, Zoom, Preset, Patrol, 3D positioning, IR control, wiper control, heat control, snow removing Note: To realize functionality above, please refer to the product's practical capacity.
Features	Sequence display, snapshot, local record, audio, two-way talk, and instant playback
Playback	
Features	Sequence display, snapshot, local record, audio, two-way talk, and instant playback
Video Source	Recording video from DVR/NVR
Max Channels	16 (Async)/16 (Sync)
Search Type	Time/event/calendar
Features	Recording schedule and download, snapshot, -16x~16x speed for forward and backward, audio, digital zoom
Alarm	
Type	Service alarms and device alarms
Alarm Triggering	Live view, recording, email, preset, alarm output and etc.
Features	Alarm schedule, actions setup, alarm memo, alarm info popup
E-Map	
Format	PNG/JPEG/BMP
Map Alarm	Alarm flash, search and acknowledge
Features	Hot spot, hot region, map zoom in/out, map group, eagle eye
System Requirements	
Operating System	Microsoft Windows7/Windows8 (32-bit or 64-bit) Note: EZ Software only supports 64-bit system compatible with 32-bit.
CPU	Intel Pentium IV 3.0 GHZ or higher (4Cores,3.0GHZ are recommended)
Memory	1GB or Higher
Network Card	Gigabit Ethernet network card (or higher) are recommended
Display Resolution	1920 x 1080 or higher