

Horn IP Speaker 30W



IP Speaker

IPHS302X

- > High-quality loud speaker with clear sound over a long range
- > Support alarm broadcast with uniview tec NVR, video and audio linkage.
- > Built in storage, support uploading custom audios
- > Support two-way audio
- > Support PoE power supply



IPHS302X IP Speaker

Accessories

Specifications

Dimensions

Power	
Rated Power	30W
Max. Acoustic Pressure	130dB SPL
Frequency Response	300Hz to 12.5KHz
Impedance	8Ω
Network	
Network Protocol	IPv4; HTTP; HTTPS; SSL/TLS; DNS; TCP; UDP; DHCP; UPnP; ARP; SSH
Interface Protocol (API)	ONVIF; RTSP; RTP; LAPI
Browser	Windows: Firefox (version 87 and above), Chrome (version 90 and above), Edge (version 90 and above) ; MAC: Safari (version 17 and above)
Build in Mic	
Frequency Response	100Hz to 8KHz
Sensitivity	-37 dBV/Pa
Sampling Rate	8KHz
Quantization Bits	16 bit
Audio	
Broadcast	Regular Broadcast, Live Broadcast, Alarm Broadcast
Two-Way Audio	Support
Audio Compression	G.711U
Audio File Format	MP3, WAV
Audio File Size	2KB ≤ Audio File Size ≤ 10MB
Audio File Max Storage	64MB
Audio Files Limit	100 (Include system built-in files)
Interface	
Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface
Audio In	1, RCA
Alarm In	2
Power Supply	PoE (IEEE 802.3at); DC 24V/2A
General	
Working Environment	-30 °C ~ 60 °C (-22 °F ~ 140 °F); ≤ 90% RH (non-condensing)
Dimensions	282mm × 205mm × 285mm (11.1"×8.1"×11.2")
Material	ABS Plastic
Protection	IP66

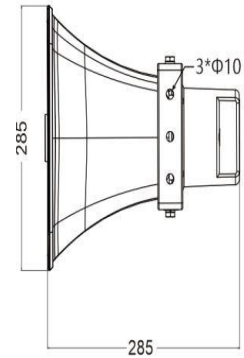

Cable Pigtail

